


Tiles

Axis

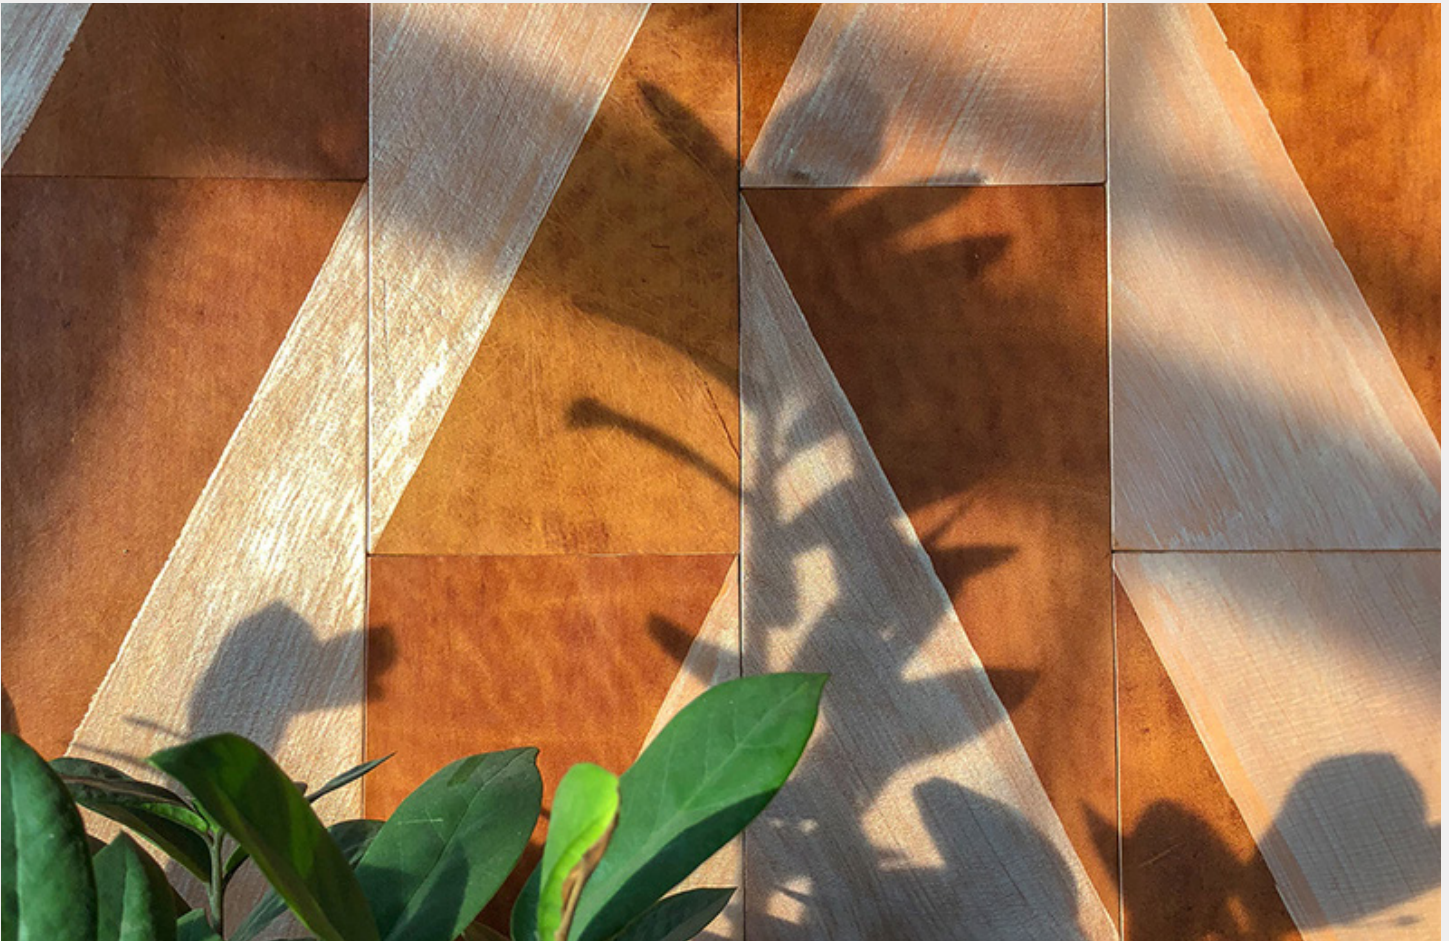

Axis | Tannin

Each Axis tile is a simple fragmented geometric but when put together, has endless configurations for installation. The natural beauty of leather means that no two pieces are exactly alike.

Leather wall tiles add unique material warmth to any space and are easy to install and care for. They have the ability to increase sound dampening when applied to walls and make for tactile inlay on cabinets or table tops. All of our tiles are made from heavy weight leather that we dye by hand.




Axis | Saddle Brown


Tiles

Axis

TILE MEASUREMENTS

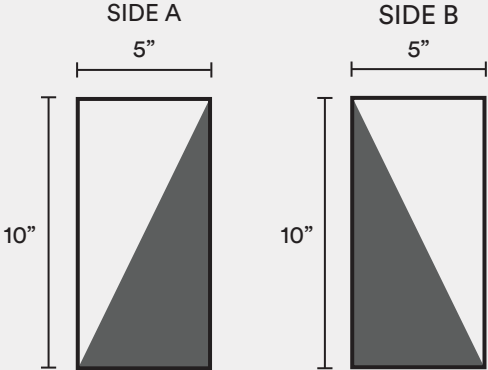

LAYOUT SUGGESTIONS

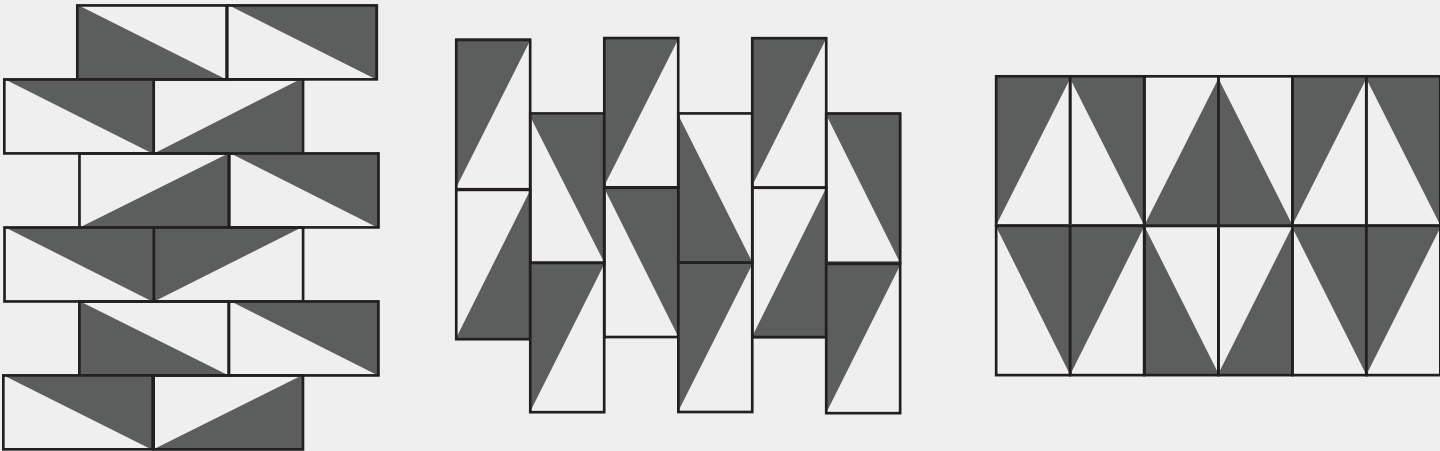

Tiles


Axis



Pattern	Axis.
Material	Solid hand dyed cowhide leather.
Leather Type	Smooth and compact grain leather.
Finish	Satin-sheen, finished with protective water resistant coating.
Weight	5 - 6 oz.
Primary Uses	Indoor wall, surface inlay, headboards. Indoor residential and commercial.
Installation	Flat tile edge to edge. Water based contact cement or construction adhesive. *Inquire for full installation guidelines.
Acclimation	Tiles should have a minimum of 1 - 2 weeks to acclimate to the area before installation.
Benefits	Sound dampening and luxurious. Leather wall tiles add unique material warmth to any space and are easy to install and care for.
Minimum Order	50 sq ft. (4.6 sq m.).
Pricing	Sold by the square foot. Comes as individual tiles.
Size	5" x 10" (12.7 cm x 25 cm) *Custom sizes available.
Sample Size*	5" x 7" (12.7 cm x 17.78 cm) *Purchase on product page: www.avoavo.com .
Ordering	Orders require a 50% deposit. All inquiries can be made to inquire@avoavo.com .
Trade Account	We offer a trade discount to interior designers and architects. Please contact us for a quote.
Lead Time	8 - 10 weeks.
Care	For regular care and dusting, tiles can be wiped with a soft dry cloth. If a stain occurs, blot immediately with a clean damp absorbent cloth/sponge. Do not wipe or scrub. Avoid any direct heat on the leather, let air-dry. Occasional use of leather cleaners or conditioners is acceptable if needed, but should be spot tested first as each product may affect the tiles differently.
Customization	Size, color and configurations can be customized. See our color library for reference: www.avoavo.com/color .
Variations	Leather is a natural product that we dye by hand. Each hide is unique and lots made at different times may vary slightly in color. Avoid exposure to direct sunlight as it might change or fade the color of your leather.
Testing	Flame retardant available on request.
Manufacture	Hand dyed in Brooklyn. Made in the United States.

Tiles Pivot

AVO

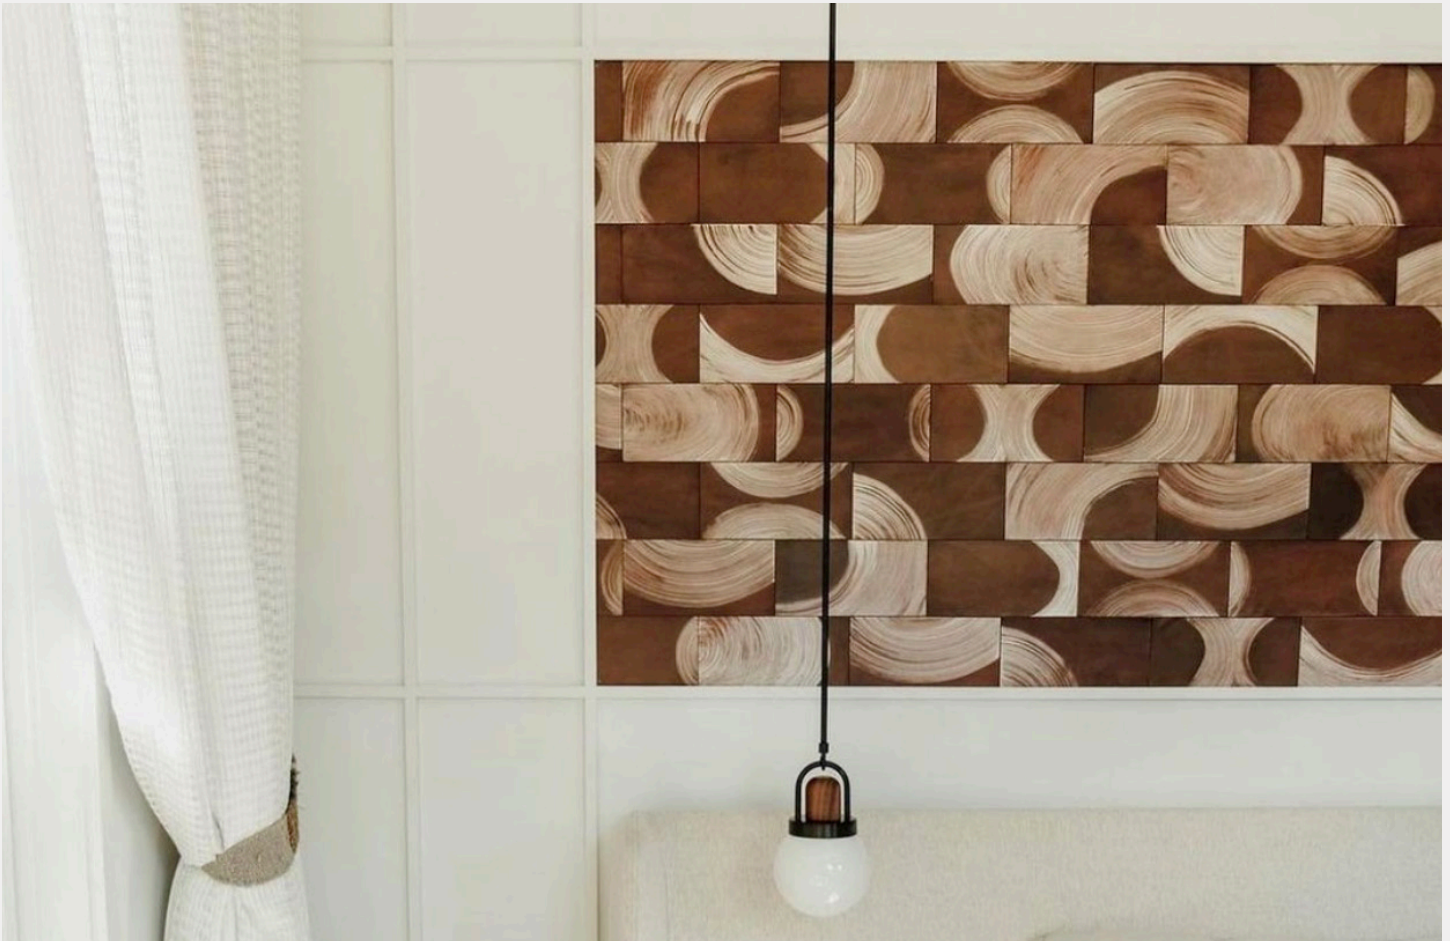

Pivot | Tannin

Pivot Tile is fragmented shapes that come together to create a beautifully random design. Using metallic and translucent dyes on full grain leather.


Leather wall tiles add unique material warmth to any space and are easy to install and care for. They have the ability to increase sound dampening when applied to walls and make for tactile inlay on cabinets or table tops. All of our tiles are made from heavy weight leather that we dye by hand.




Pivot | Frosted Coral

Tiles Pivot

TILE MEASUREMENTS

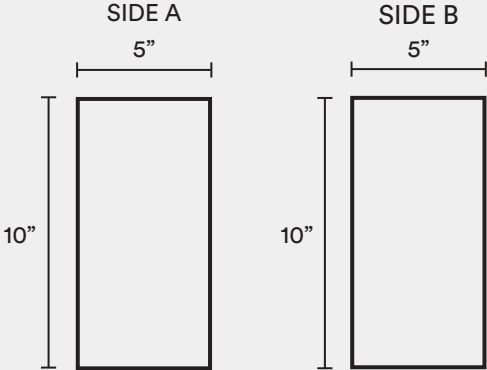

PATTER SET

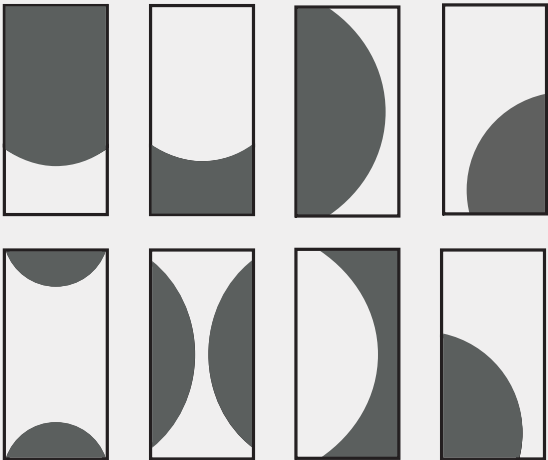

Tiles

Pivot



Pattern	Pivot
Material	Solid hand dyed cowhide leather.
Leather Type	Smooth and compact grain leather.
Finish	Satin-sheen, finished with protective water resistant coating.
Weight	5 - 6 oz.
Primary Uses	Indoor wall, surface inlay, headboards. Indoor residential and commercial.
Installation	Flat tile edge to edge. Water based contact cement or construction adhesive. *Inquire for full installation guidelines.
Acclimation	Tiles should have a minimum of 1 - 2 weeks to acclimate to the area before installation.
Benefits	Sound dampening and luxurious. Leather wall tiles add unique material warmth to any space and are easy to install and care for.
Minimum Order	50 sq ft. (4.6 sq m.).
Pricing	Sold by the square foot. Comes as individual tiles.
Size	5" x 10" (12.7 cm x 25 cm) *Custom sizes available.
Sample Size*	5" x 7" (12.7 cm x 17.78 cm) *Purchase on product page: www.avoavo.com .
Ordering	Orders require a 50% deposit. All inquiries can be made to inquire@avoavo.com .
Trade Account	We offer a trade discount to interior designers and architects. Please contact us for a quote.
Lead Time	8 - 10 weeks.
Care	For regular care and dusting, tiles can be wiped with a soft dry cloth. If a stain occurs, blot immediately with a clean damp absorbent cloth/sponge. Do not wipe or scrub. Avoid any direct heat on the leather, let air-dry. Occasional use of leather cleaners or conditioners is acceptable if needed, but should be spot tested first as each product may affect the tiles differently.
Customization	Size, color and configurations can be customized. See our color library for reference: www.avoavo.com/color .
Variations	Leather is a natural product that we dye by hand. Each hide is unique and lots made at different times may vary slightly in color. Avoid exposure to direct sunlight as it might change or fade the color of your leather.
Testing	Flame retardant available on request.
Manufacture	Hand dyed in Brooklyn. Made in the United States.

Tiles

Salt Wash



Salt Wash | White with mixed textures

Salt Wash Tiles are designed with varied textures to look like marble with a nod to traditional Roman bricks. They are hand dyed using opaque and translucent pigments on full grain leather.

Leather wall tiles add unique material warmth to any space and are easy to install and care for. They have the ability to increase sound dampening when applied to walls and make for tactile inlay on cabinets or table tops. All of our tiles are made from heavy weight leather that we dye by hand.




Salt Wash | White with mixed textures





Tiles

Salt Wash

TILE MEASUREMENTS



LAYOUT SUGGESTIONS

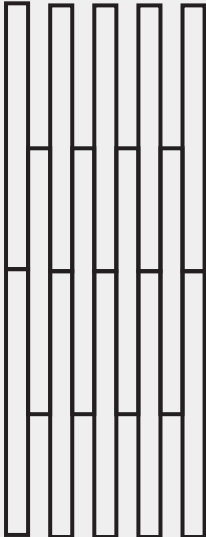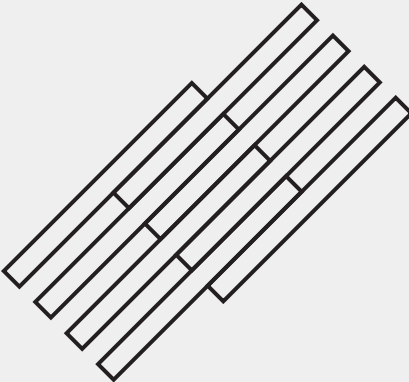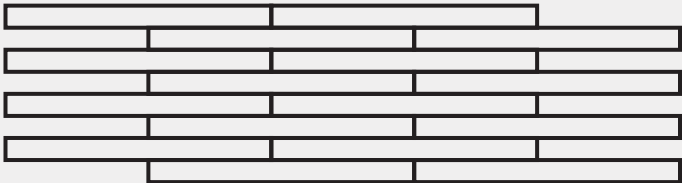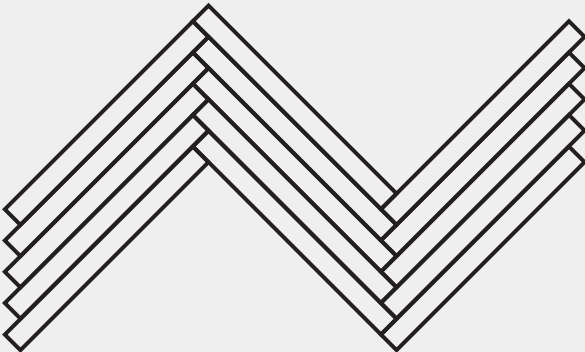

Tiles

Salt Wash



Pattern	Salt Wash.
Material	Solid hand dyed cowhide leather.
Leather Type	Smooth and compact grain leather.
Finish	Satin-sheen, finished with protective water resistant coating.
Weight	5 - 6 oz.
Primary Uses	Indoor wall, surface inlay, headboards. Indoor residential and commercial.
Installation	Flat tile edge to edge. Water based contact cement or construction adhesive. *Inquire for full installation guidelines.
Acclimation	Tiles should have a minimum of 1 - 2 weeks to acclimate to the area before installation.
Benefits	Sound dampening and luxurious. Leather wall tiles add unique material warmth to any space and are easy to install and care for.
Minimum Order	50 sq ft. (4.6 sq m.).
Pricing	Sold by the square foot. Comes as individual tiles.
Size	2.5" x 20" (6.35 cm x 50.8 cm) *Custom sizes available.
Sample Size*	2.5" x 9" (6.35 cm x 22.86 cm) *Purchase on product page: www.avoavo.com .
Ordering	Orders require a 50% deposit. All inquiries can be made to inquire@avoavo.com .
Trade Account	We offer a trade discount to interior designers and architects. Please contact us for a quote.
Lead Time	8 - 10 weeks.
Care	For regular care and dusting, tiles can be wiped with a soft dry cloth. If a stain occurs, blot immediately with a clean damp absorbent cloth/sponge. Do not wipe or scrub. Avoid any direct heat on the leather, let air-dry. Occasional use of leather cleaners or conditioners is acceptable if needed, but should be spot tested first as each product may affect the tiles differently.
Customization	Size, color and configurations can be customized. See our color library for reference: www.avoavo.com/color .
Variations	Leather is a natural product that we dye by hand. Each hide is unique and lots made at different times may vary slightly in color. Avoid exposure to direct sunlight as it might change or fade the color of your leather.
Testing	Flame retardant available on request.
Manufacture	Hand dyed in Brooklyn. Made in the United States.

Tiles

Scallop

AVO



Scallop | Frosted Black

Our Scallop Tiles are a playful and bold take on traditional wood shingles. Designed to have a 3D layered look to add depth to your space.


Leather wall tiles add unique material warmth to any space and are easy to install and care for. They have the ability to increase sound dampening when applied to walls and make for tactile inlay on cabinets or table tops. All of our tiles are made from heavy weight leather that we dye by hand.



Scallop | Frosted Pearl


Tiles Scallop

TILE MEASUREMENTS

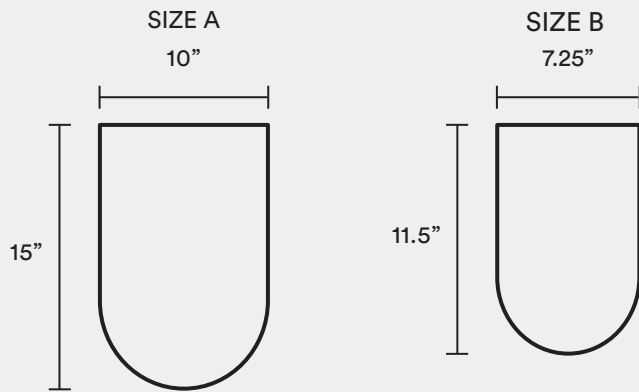


LAYOUT SUGGESTIONS

Layout A Spacing for 10"x15" tile only

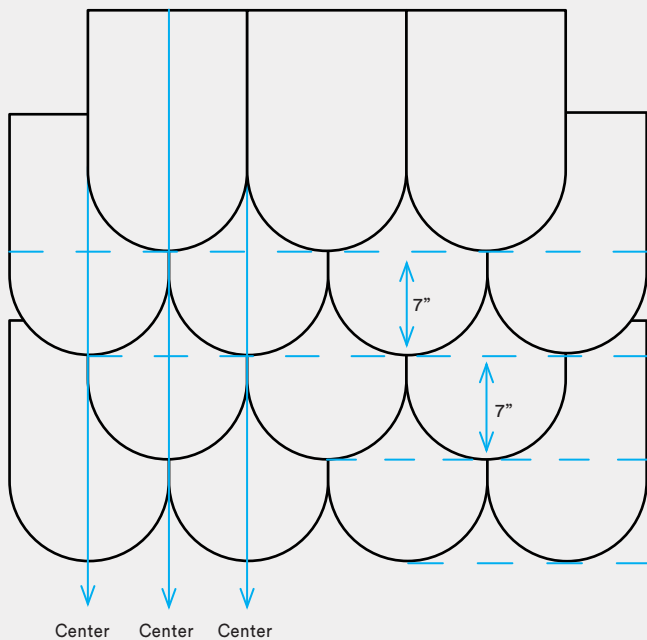

Layout B Spacing for 7.25"x11.5" tile only

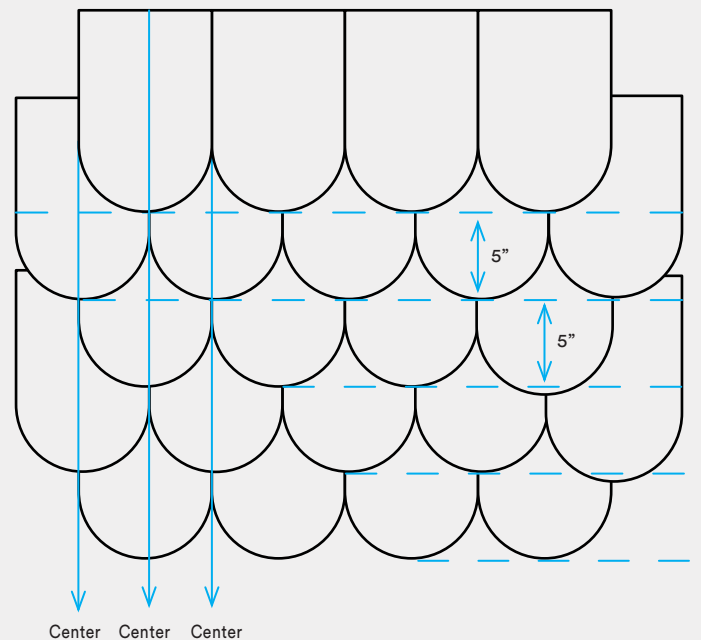

Tiles

Scallop



Pattern	Scallop.
Material	Solid hand dyed cowhide leather.
Leather Type	Smooth and compact grain leather.
Finish	Satin-sheen, finished with protective water resistant coating.
Weight	7 - 8 oz.
Primary Uses	Indoor wall, surface inlay, headboards. Indoor residential and commercial.
Installation	Overlapping tile. Construction adhesive. *Inquire for full installation guidelines.
Acclimation	Tiles should have a minimum of 1 - 2 weeks to acclimate to the area before installation.
Benefits	Sound dampening and luxurious. Leather wall tiles add unique material warmth to any space and are easy to install and care for.
Minimum Order	50 sq ft. (4.6 sq m.).
Pricing	Sold by the square foot. Comes as individual tiles.
Size	A: 10" x 15" (25.4 cm x 38.1 cm) / B: 7.25" x 11.5" (18.415 cm x 29.21 cm) *Custom sizes available.
Sample Size*	4" x 7" (10.16 cm x 17.78 cm) *Purchase on product page: www.avoavo.com
Ordering	Orders require a 50% deposit. All inquiries can be made to inquire@avoavo.com .
Trade Account	We offer a trade discount to interior designers and architects. Please contact us for a quote.
Lead Time	8 - 10 weeks.
Care	For regular care and dusting, tiles can be wiped with a soft dry cloth. If a stain occurs, blot immediately with a clean damp absorbent cloth/sponge. Do not wipe or scrub. Avoid any direct heat on the leather, let air-dry. Occasional use of leather cleaners or conditioners is acceptable if needed, but should be spot tested first as each product may affect the tiles differently.
Customization	Size, color and configurations can be customized. See our color library for reference: www.avoavo.com/color .
Variations	Leather is a natural product that we dye by hand. Each hide is unique and lots made at different times may vary slightly in color. Avoid exposure to direct sunlight as it might change or fade the color of your leather.
Testing	Flame retardant available on request.
Manufacture	Hand dyed in Brooklyn. Made in the United States.

Tiles


Slanted Hill



Slanted Hill | Cobalt White

Slanted Hill is not for the timid. It has a striking presence in a space and creates a dynamic feature wall. It has endless configurations and color options.

Leather wall tiles add unique material warmth to any space and are easy to install and care for. They have the ability to increase sound dampening when applied to walls and make for tactile inlay on cabinets or table tops. All of our tiles are made from heavy weight leather that we dye by hand.

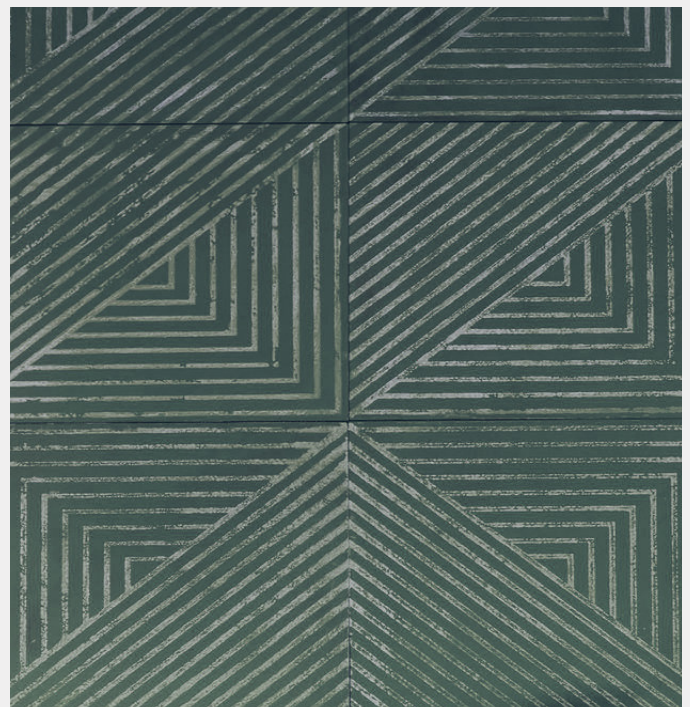


Slanted Hill | Nori White


Tiles

Slanted Hill

TILE MEASUREMENTS

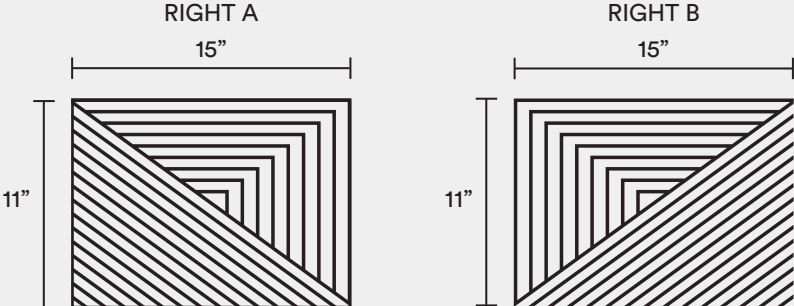

LAYOUT SUGGESTIONS

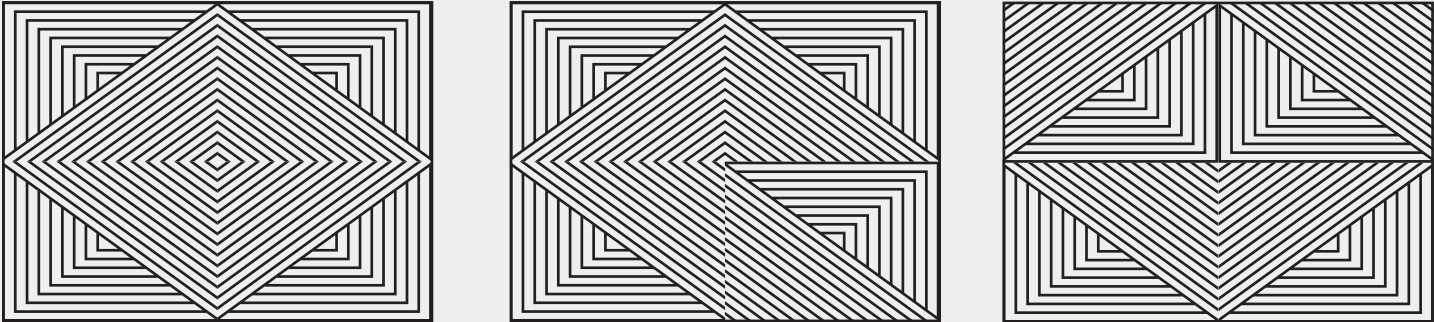

Tiles

Slanted Hill



Pattern	Slanted Hill.
Material	Solid hand dyed cowhide leather.
Leather Type	Smooth and compact grain leather.
Finish	Satin-sheen, finished with protective water resistant coating.
Weight	5 - 6 oz.
Primary Uses	Indoor wall, surface inlay, headboards. Indoor residential and commercial.
Installation	Flat tile edge to edge. Water based contact cement or construction adhesive. *Inquire for full installation guidelines.
Acclimation	Tiles should have a minimum of 1 - 2 weeks to acclimate to the area before installation.
Benefits	Sound dampening and luxurious. Leather wall tiles add unique material warmth to any space and are easy to install and care for.
Minimum Order	50 sq ft. (4.6 sq m.).
Pricing	Sold by the square foot. Comes as individual tiles.
Size	11" x 15" (27.94 cm x 38.1 cm) *Custom sizes available.
Sample Size*	5" x 7" (12.7 cm x 17.78 cm) *Purchase on product page: www.avoavo.com
Ordering	Orders require a 50% deposit. All inquiries can be made to inquire@avoavo.com .
Trade Account	We offer a trade discount to interior designers and architects. Please contact us for a quote.
Lead Time	8 - 10 weeks.
Care	For regular care and dusting, tiles can be wiped with a soft dry cloth. If a stain occurs, blot immediately with a clean damp absorbent cloth/sponge. Do not wipe or scrub. Avoid any direct heat on the leather, let air-dry. Occasional use of leather cleaners or conditioners is acceptable if needed, but should be spot tested first as each product may affect the tiles differently.
Customization	Size, color and configurations can be customized. See our color library for reference: www.avoavo.com/color .
Variations	Leather is a natural product that we dye by hand. Each hide is unique and lots made at different times may vary slightly in color. Avoid exposure to direct sunlight as it might change or fade the color of your leather.
Testing	Flame retardant available on request.
Manufacture	Hand dyed in Brooklyn. Made in the United States.

Tiles Strata

AVO



Strata | Cobalt

With light washes of glaze and hand dyed layers, Strata is made to create visual tonal depth of color on each tile. Once assembled together they create a randomized fragmented landscape.




Leather wall tiles add unique material warmth to any space and are easy to install and care for. They have the ability to increase sound dampening when applied to walls and make for tactile inlay on cabinets or table tops. All of our tiles are made from heavy weight leather that we dye by hand.





Strata | Cobalt

Tiles Strata

TILE MEASUREMENTS



LAYOUT SUGGESTIONS

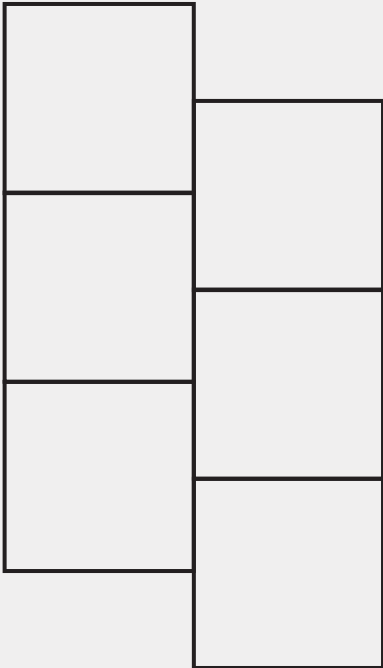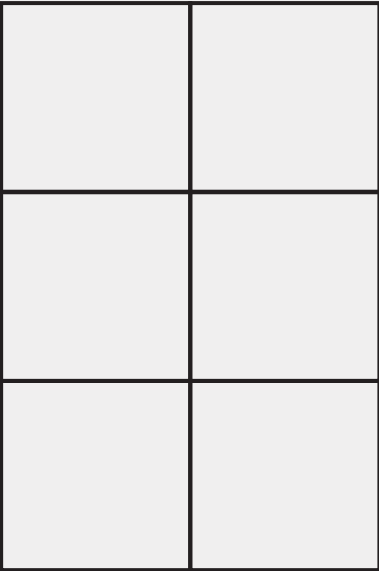

Tiles Strata



Pattern	Strata.
Material	Solid hand dyed cowhide leather.
Leather Type	Smooth and compact grain leather.
Finish	Satin-sheen, finished with protective water resistant coating.
Weight	5 - 6 oz.
Primary Uses	Indoor wall, surface inlay, headboards. Indoor residential and commercial.
Installation	Flat tile edge to edge. Water based contact cement or construction adhesive. *Inquire for full installation guidelines.
Acclimation	Tiles should have a minimum of 1 - 2 weeks to acclimate to the area before installation.
Benefits	Sound dampening and luxurious. Leather wall tiles add unique material warmth to any space and are easy to install and care for.
Minimum Order	50 sq ft. (4.6 sq m.).
Pricing	Sold by the square foot. Comes as individual tiles.
Size	8" x 8" (20 x 20 cm) / 10" x 10" (25 x 25 cm) / 12" x 12" (30 x 30 cm) *Custom sizes available.
Sample Size*	5" x 7" (12.7 cm x 17.78 cm) *Purchase on product page: www.avoavo.com
Ordering	Orders require a 50% deposit. All inquiries can be made to inquire@avoavo.com .
Trade Account	We offer a trade discount to interior designers and architects. Please contact us for a quote.
Lead Time	8 - 10 weeks.
Care	For regular care and dusting, tiles can be wiped with a soft dry cloth. If a stain occurs, blot immediately with a clean damp absorbent cloth/sponge. Do not wipe or scrub. Avoid any direct heat on the leather, let air-dry. Occasional use of leather cleaners or conditioners is acceptable if needed, but should be spot tested first as each product may affect the tiles differently.
Customization	Size, color and configurations can be customized. See our color library for reference: www.avoavo.com/color .
Variations	Leather is a natural product that we dye by hand. Each hide is unique and lots made at different times may vary slightly in color. Avoid exposure to direct sunlight as it might change or fade the color of your leather.
Testing	Flame retardant available on request.
Manufacture	Hand dyed in Brooklyn. Made in the United States.

Tiles Transit


AVO



Transit | Gold with white wash

Our Transit tile has a timeless feeling. Made from a structured block print, it is multi directional and ever changing.


Leather wall tiles add unique material warmth to any space and are easy to install and care for. They have the ability to increase sound dampening when applied to walls and make for tactile inlay on cabinets or table tops. All of our tiles are made from heavy weight leather that we dye by hand.

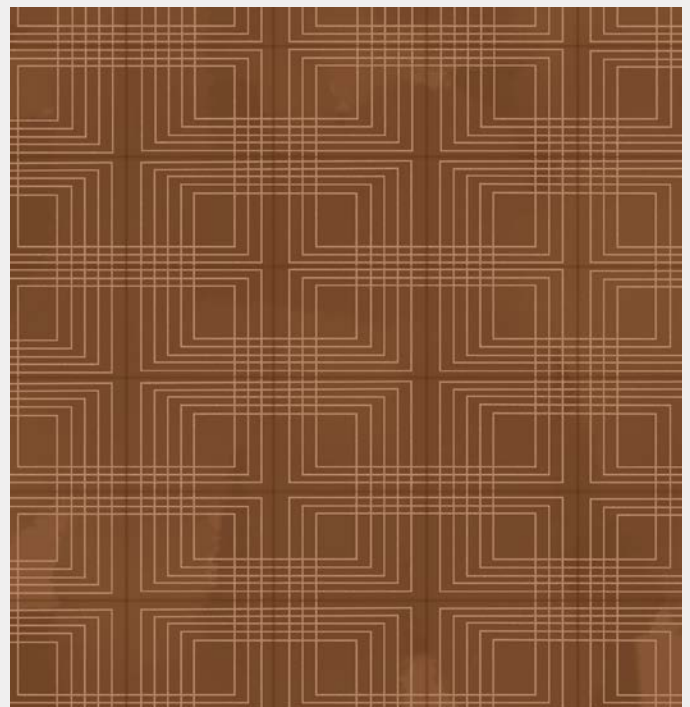


Transit | White with tannin wash

Tiles Transit

TILE MEASUREMENTS

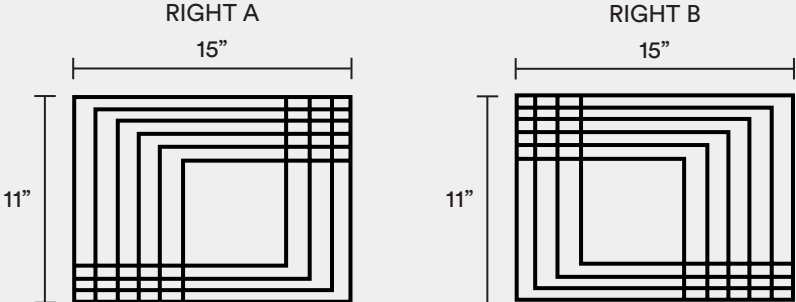

LAYOUT SUGGESTIONS

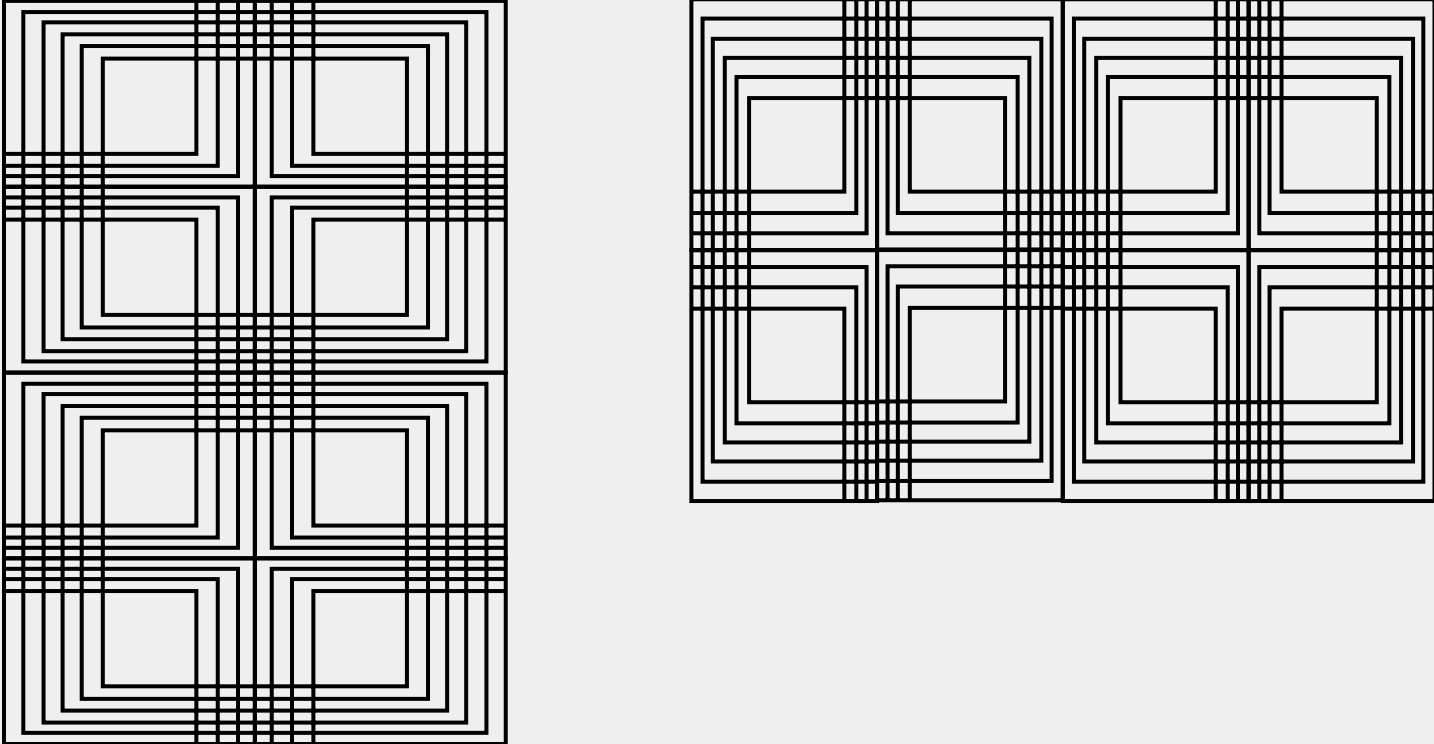

Tiles Transit



Pattern	Transit.
Material	Solid hand dyed cowhide leather.
Leather Type	Smooth and compact grain leather.
Finish	Satin-sheen, finished with protective water resistant coating.
Weight	5 - 6 oz.
Primary Uses	Indoor wall, surface inlay, headboards. Indoor residential and commercial.
Installation	Flat tile edge to edge. Water based contact cement or construction adhesive. *Inquire for full installation guidelines.
Acclimation	Tiles should have a minimum of 1 - 2 weeks to acclimate to the area before installation.
Benefits	Sound dampening and luxurious. Leather wall tiles add unique material warmth to any space and are easy to install and care for.
Minimum Order	50 sq ft. (4.6 sq m.).
Pricing	Sold by the square foot. Comes as individual tiles.
Size	11" x 15" (27.94 cm x 38.1 cm) *Custom sizes available.
Sample Size*	5" x 7" (12.7 cm x 17.78 cm) *Purchase on product page: www.avoavo.com .
Ordering	Orders require a 50% deposit. All inquiries can be made to inquire@avoavo.com .
Trade Account	We offer a trade discount to interior designers and architects. Please contact us for a quote.
Lead Time	8 - 10 weeks.
Care	For regular care and dusting, tiles can be wiped with a soft dry cloth. If a stain occurs, blot immediately with a clean damp absorbent cloth/sponge. Do not wipe or scrub. Avoid any direct heat on the leather, let air-dry. Occasional use of leather cleaners or conditioners is acceptable if needed, but should be spot tested first as each product may affect the tiles differently.
Customization	Size, color and configurations can be customized. See our color library for reference: www.avoavo.com/color .
Variations	Leather is a natural product that we dye by hand. Each hide is unique and lots made at different times may vary slightly in color. Avoid exposure to direct sunlight as it might change or fade the color of your leather.
Testing	Flame retardant available on request.
Manufacture	Hand dyed in Brooklyn. Made in the United States.